

**New**

# Visualize sensor information



---

Easy connection to  
IO-Link Master.

---

Reduced production  
downtime loss.

---

Reduced man-hours  
maintenance.

---

 **IO-Link**

# Corresponds to IO-Link

IO-Link makes installation and replacement easier

Please visit <https://www.io-link.com/> for further information.



## Select Units


### Solid Color

LR6-E-R/Y/G/B/C



### Multi-Color

LR6-E-MZ

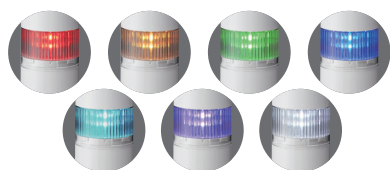

### Clear Globe

LR6-E-RZ/YZ/GZ/BZ



### Buzzer Unit

LR6-BW



### Wireless Data Acquisition System Transmitter

WDT-6LR-Z2

Available to collect data of production in both of corresponding to IO-Link and not.

WDR-LE-Z2 receiver and on-site signal strength test are required.



## Select an attachment



SZK-003W




SZ-016A




SZP-004W



SZ-010



POLE-800A21



POLE-300A21



POLE-100A21

M12 cable with one side of bare cable is required when SZP-004W is used.

## Product Specifications

Model code	Pre-assembled Model (Direct mount) LR6-3ILWMNW-RYG	Body Unit (Direct mount) LR6-ILWMNW	Body Unit (1/2" NPT pipe or direct mount) LR6-ILWCNW
Size	60mm		
Tier	LED Unit: Max. 5 tiers and one buzzer Unit		
Light color	Red / Amber / Green (Adding or changing LED units is possible)	-	-
Light control	Continuous / Flashing		
Buzzer sound pressure	Typ. 84dB (Use LR6-BW)		
Buzzer sound selection	4 types (Selectable) (Use LR6-BW)		
Protection Rating	IP65		
Wiring	M12 Connector 5 pins		

**PATLITE**<sup>®</sup>

Sensormatic srl - Via della Beverara 13 - 40131 Bologna - Italia  
Tel. +39 051 6353 511 - Fax +39 051 6345 925 - [www.sensormatic.it](http://www.sensormatic.it)

**SENSORMATIC**  
SPECIALIST&SOLUTIONS