

ARLM-54

Dinel®

ANTENNA RADAR LEVEL METER

Designed for reliable level measurement of a wide variety of liquids and pasty substances



HART
COMMUNICATION PROTOCOL



- Non-contact antenna radar level meter
- Measuring range up to 8 m or up to 20 m
- Variable installation thanks to the possibility of connection via the bottom or top thread
- Intelligent numerical signal processing
- with elimination of false reflections
- Connection via two-core cable
- Option of choosing standard cable gland or gland for protective hose
- Current output (4 ... 20 mA) with HART® protocol
- Measurement independent of temperature and pressure of the atmosphere above the surface
- Measurement also possible in aggressive vapors
- High degree of protection IP68

TECHNICAL SPECIFICATIONS

working environment	non-explosion environment	
supply voltage	18 ... 34 V DC	
output type	current 4 ... 20 mA with HART® communication (limit values 3,9 - 20,5 mA)	
current consumption	4 ... 20 mA / max. 22 mA	
basic measurement accuracy	3 mm (distance 1 m ... 8/20 m) 10 mm (distance 0.3 m ... 1 m)	
current output error	max. 80 µA	
resolution	0,1 mm	
maximum range	8 m, 20 m	
dead zone	30 cm	
adjustable measuring range (SPAN)	min. 200 mm	
function principle	FMCW	
operating temperature range	-30 ... +70 °C	
maximum operating overpressure	2 bar	
measuring frequency	25 GHz (K-Band)	
measurement sensitivity	3 levels	
damping	1 ... 99 sec	
status signaling (echo dropout)	3,75 mA; 4 mA; 20 mA; 22 mA; NO CHANGE	
time of the first measurement from the start of the power supply	20 sec	
maximum load resistance at	U=24 V U=22 V U=20 V	R=270 Ω* R=180 Ω R=90 Ω
protection class	IP 68	
cable	PVC 2 x 0,75 mm²	

* 250Ω HART® resistor included

BASIC FEATURES AND USE

Non-contact radar level meters with an antenna are suitable for continuous level measurement at medium and longer distances. They can be used both in various closed tanks, containers, in semi-open sumps, and in open space. Their use is suitable where their advantages are fully realized:

1. non-contact measurement
2. independence of measurement on temperature and atmospheric pressure above the surface
3. possibility of measurement even in vacuum
4. possibility of measurement even in aggressive vapors
5. measurement is independent of medium parameters


The ARLM-54 radar level meter operates on the FMCW (frequency modulated continuous wave) principle with a frequency of 25 GHz (K-Band).

The level meter is equipped with a compact covered funnel antenna. The antenna cover prevents dirt, vapors and gases from penetrating the antenna.


The ARLM-54 is designed for measuring the level of liquid or pasty substances.

The level meter is two-wire with a current output of 4 ... 20 mA with HART® communication. Measuring range 0.3 ... 8 m or 0.3 ... 20 m.


USAGE

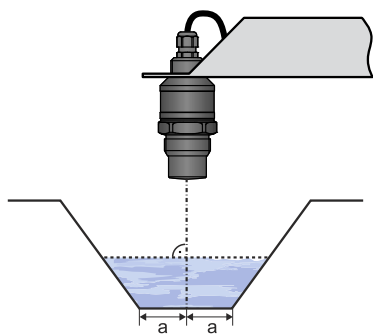

Installation in the gutter



Recommended installation of the ARLM-54 level gauge in the tank through the top thread




Recommended installation of the ARLM-54 level gauge in the tank using the bottom thread

USED MATERIALS


parts of the sensor	standard material
Process connection	plastic PP
Housing	plastic PP + GF30
Cable gland	plastic - PA

DIMENSIONS

ARLM-54N-08

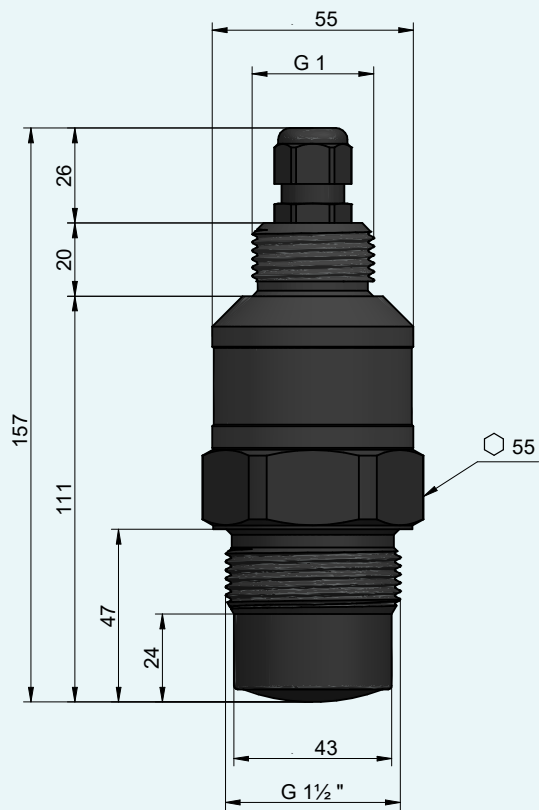


ARLM-54N-20

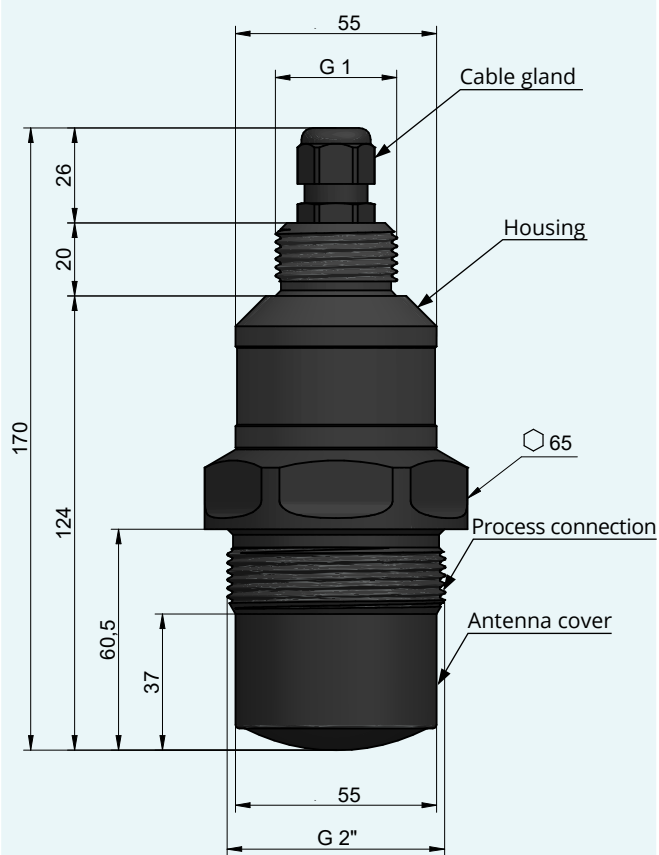


ELECTRICAL CONNECTION


CABLE GLAND
M16 X 1,5
TYPE B



CABLE GLAND
FOR PROTECTIVE HOSE
TYPE H




The level gauge is connected to the control (evaluation) device by a hard-wired cable.

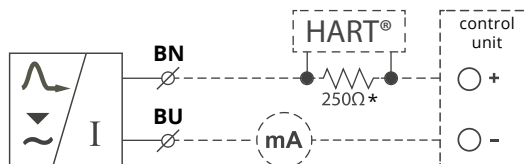

Connection diagram of the level gauge
with current output ARLM-54

* When using HART® communication

CONNECTION TO PCU-100

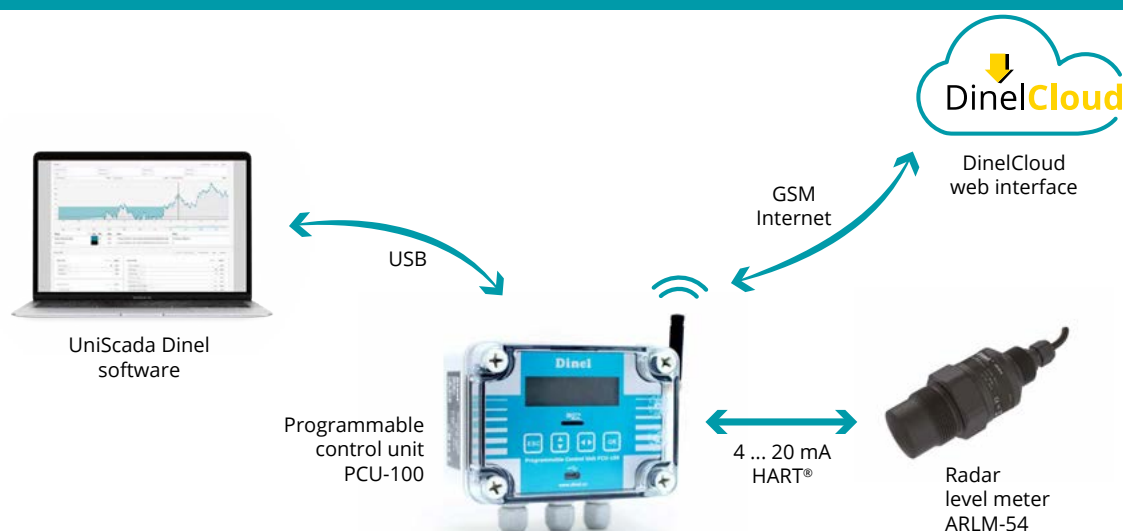

CONNECTION TO UHC-01



ORDER CODE

ARLM-54

PERFORMANCE

N non-explosive environments

MAXIMUM RANGE

08 0,3 ... 8 m

20 0,3 ... 20 m

PROCESS CONNECTION

G1½ pipe thread G1½" (version 08)

G2 pipe thread G2" (version 20)

OUTPUT TYPE

I current output

ELECTRICAL CONNECTION

B short cable gland

H plastic cable gland for protective hose


CABLE

K cable length in meters







ARLM-54 N - 20 - G2 - I - B - K 5

EXAMPLE OF CODING

RECOMMENDED EVALUATION AND POWER SUPPLY UNIT

power supply of sensors, converting their status to power contact and remote parameterization	at extra cost	PCU-100	
---	---------------	---------	---

ACCESSORIES

extendable bracket	at extra cost	VKD	
2x EPDM gasket (o-ring)	included in the price	Ø30 x 3,5 mm Ø44 x 4 (pro G1½) Ø54 x 4 (pro G2)	
converter from USB to HART®	at extra cost	UHC-01	
plastic fixing nuts	at extra cost	PUM-G1 PUM-G1½ PUM-G2	
stainless steel or steel sleeves	at extra cost	NN-G1 ON-G1 NN-G1½ ON-G1½ NN-G2 ON-G2	
Protective hose (for version with „H” type outlet)	at extra cost	OH-13	

The manufacturer reserves the right to change the specifications and appearance of the product without prior notice.

Dinel, s.r.o.
U Tescomy 249, 760 01 Zlín
tel.: +420 577 002 000
e-mail: sale@dinel.cz

www.dinel.cz

version:
04/2025

