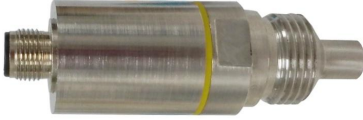
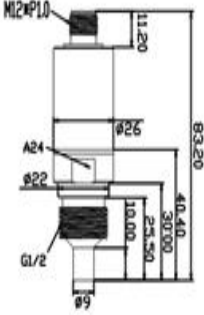
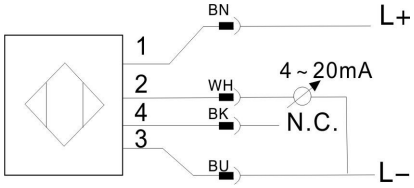

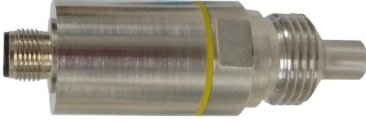
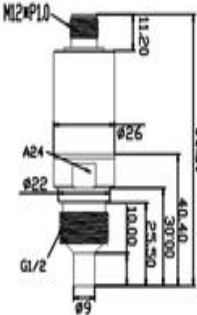
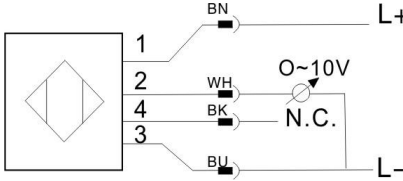

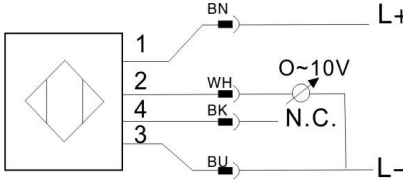

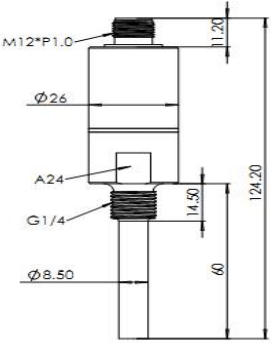


<p>TC0102                  Compact Temperature Sensors                  M12 socket                  Connection: External thread G1/2                  Analogue output                  Sensing range                  -40...100°C                  -40...212°F</p>	 <p>CE RoHS</p>
Applications	Liquid and gas
Electric design	DC
Output	Analogue output 4...20mA
Supply voltage[V]	18...36DC
Reverse polarity protection	Yes
Overload protection	Yes
Analogue output	4...20mA
Analogue output response time[ms]	3
Accuracy[°C/°F]	±0.1/32
Ambient temperature [°C/°F]	-40...100/-40...212
Medium temperature [°C/°F]	-40...100/-40...212
Storage temperature[°C/°F]	-25...80/-13...176
Insulation resistance[MΩ]	>100(500 VDC)
Protection/Enclosure Rating	IP68
Dimensions[mm]	
ESD[KV]	II
EFT[KV]	IIII
Walkie talkie experiment[M]	1
Shock resistance[g]	50
Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	Stainless steel 316L
Connection	M12 socket
Wiring	
Core color	



<p>TC0103                  Compact Temperature Sensors                  M12 socket                  Connection: External thread G1/2                  Analogue output                  Sensing range                  -40...100°C                  -40...212°F</p>	 <p>CE RoHS</p>
Applications	Liquid and gas
Electric design	DC
Output	0~10V Analogue output
Supply voltage[V]	18...36DC
Reverse polarity protection	Yes
Overload protection	Yes
Analogue output	0~10V
Analogue output response time[ms]	3
Accuracy[°C/°F]	±0.1/32
Ambient temperature [°C/°F]	-40...100/-40...212
Medium temperature [°C/°F]	-40...100/-40...212
Storage temperature[°C/°F]	-25...80/-13...176
Insulation resistance[MΩ]	>100(500 VDC)
Protection/Enclosure Rating	IP68
Dimensions[mm]	
ESD[KV]	II
EFT[KV]	IIII
Walkie talkie experiment[M]	1
Shock resistance[g]	50
Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	Stainless steel 316L
Connection	M12 socket
<p>Wiring                  Core color</p>  	

<p>TC0104                  Compact Temperature Sensors                  M12 socket                  Connection: External thread G1/4                  Probe length: L=60mm                  Analogue output                  Sensing range                  -40...100°C                  -40...212°F</p>	 <p>CE RoHS</p>
Applications	Liquid and gas
Electric design	DC
Output	4...20mA Analogue output
Supply voltage[V]	18...36DC
Reverse polarity protection	yes
Overload protection	yes
Analogue output	4...20mA
Analogue output response time[ms]	3
Accuracy[°C/°F]	±0.1/32
Ambient temperature [°C/°F]	-40...100/-40...212
Medium temperature [°C/°F]	-40...100/-40...212
Storage temperature[°C/°F]	-25...80/-13...176
Insulation resistance[MΩ]	>100(500 VDC)
Protection/Enclosure Rating	IP68
Dimensions[mm]	
ESD[KV]	II
EFT[KV]	IIII
Walkie talkie experiment[M]	1
Shock resistance[g]	50
Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	Stainless steel 316L
Connection	M12 socket
<p>Wiring</p> <p>Core color</p> 