

Gate Bolt for Tongue Interlocks: **GBA-1, GBA-1-SS**

FEATURES & APPLICATION:



The GBL-1 and GBA-1 Gate Bolts are available in either steel or 316-grade stainless steel. These bolts can withstand shearing forces of up to 10,000 Newtons (F1Max) on large hinged doors.

They are easy to install on both hinged and sliding guards using four M6 mounting bolts, with no need for additional brackets or door handles once in place.

The design ensures resistance to misalignment damage, and operators must manually close the guard, preventing accidental closure.

A padlock hole is included, allowing the handle to be locked open, ensuring the guard remains open and the machine cannot be started during maintenance.



The metal version is finished in yellow and black to enhance hazard identification.



Supplied with Handle and Flat Actuator (Type F).

DIMENSIONS:

Type: GBA-1 & GBA-1-SS

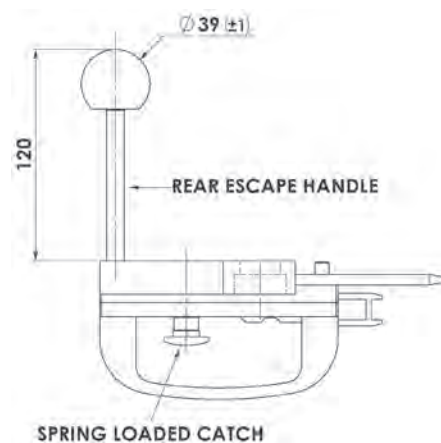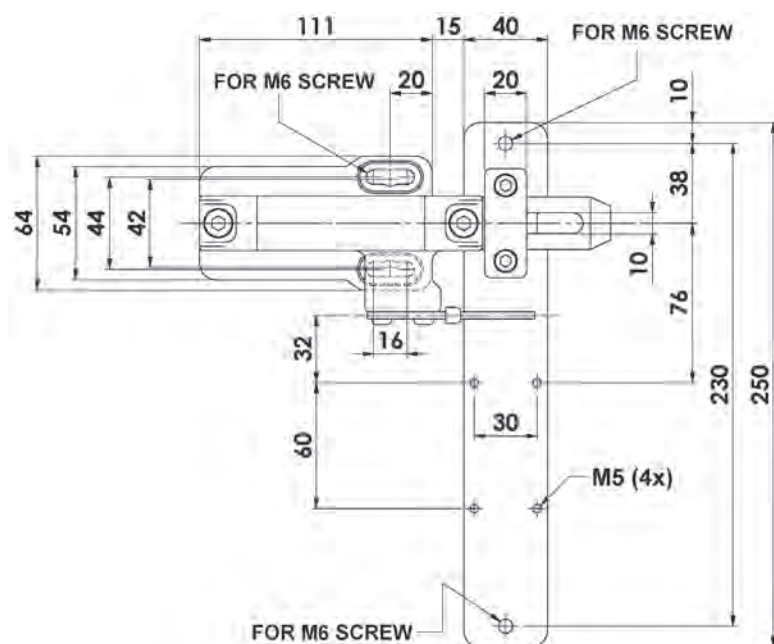

Gate Bolt for Tongue Interlocks: **GBA-1, GBA-1-SS**


PART NUMBERS FOR DIE-CAST VERSIONS:




Type: GBA-1
Shown fitted with KM
Tongue Switch

DESCRIPTION		SALES NUMBER	SUITABILITY
Gate Bolt Tongue	GBA-1 Left Hand	210003	Suitable for Switch Type: KM
Gate Bolt Tongue	GBA-1 Right Hand	210004	
	Rear Handle	210005	Suitable for GBL-1 and GBA-1
	Spring Loaded Catch	210006	Suitable for GBL-1 and GBA-1

PART NUMBERS FOR STAINLESS STEEL VERSIONS:

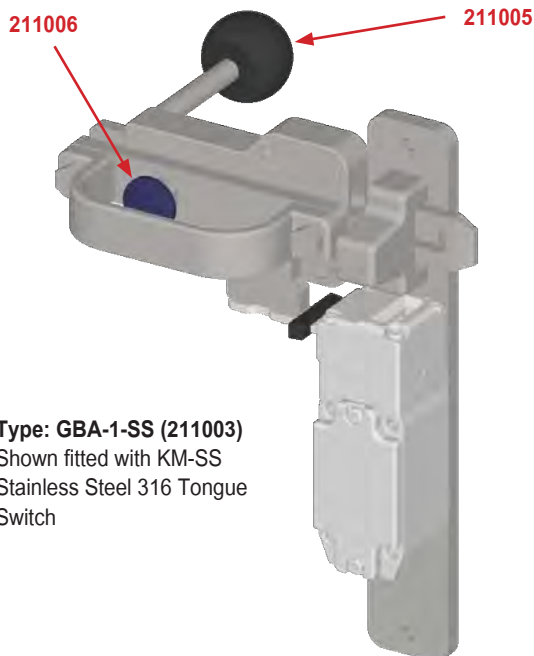

Type: GBA-1-SS (211003)
Shown fitted with KM-SS
Stainless Steel 316 Tongue
Switch

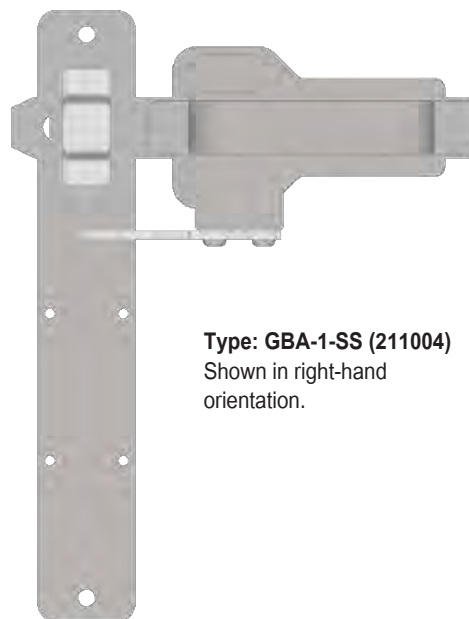

Type: GBA-1-SS (211004)
Shown in right-hand
orientation.

DESCRIPTION		SALES NUMBER	SUITABILITY
Gate Bolt Tongue	GBA-1-SS Left Hand	211003	Suitable for Switch Type: KM-SS
Gate Bolt Tongue	GBA-1-SS Right Hand	211004	
	Rear Handle - Stainless Steel	211005	Suitable for GBL-1-SS and GBA-1-SS
	Spring Loaded Catch - Stainless Steel	211006	Suitable for GBL-1-SS and GBA-1-SS